

AUTONOMIC


KP-6 DESIGNER KEYPAD

規格

KP-6入牆式鍵盤造型優雅，設計簡單且使用便利，搭配使用將為您的Mirage音頻系統帶來質感上的提升。具有八個觸覺按鍵和LED指示燈。



提供黑(KP-6B)或白(KP-6)兩種選擇

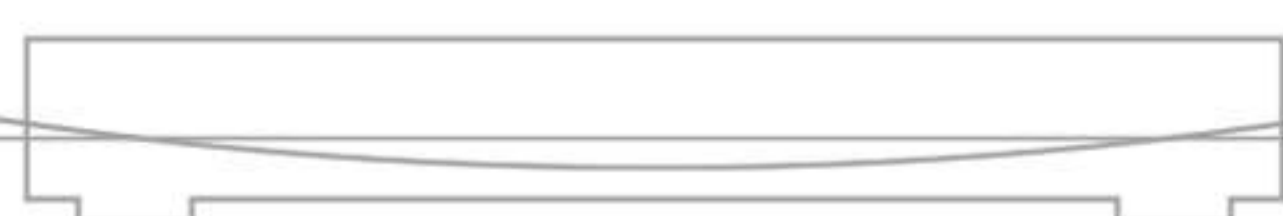

MIRAGE
AUDIO SYSTEM

完善您的

MIRAGE音響系統

使用Mirage連結多達96個區域的媒體伺服器(適用型號MMS-5A和MMS-2A)和Mirage擴大機(適用M-800和M-400)，享受全家庭音響系統所能提供的最大內容多樣性、質量和體驗。



MMS-5A



MMS-2A



M-800



M-400

特色

- 每個區域的四個用戶可預設編程
- 可控制功率、音量和音源選擇
- IR接收器和LED指示燈
- 可與標準Lutron Decora形式的面板兼容
- 鍵盤預設分組
- 提供黑色選項(KP-6B)
- 提供歐式轉換配件

規格

工作電壓	12V DC ± 3V
電流消耗	< 5mA
佈線	高達300米的Cat5e (不包括在內)
連接方式	RJ45插頭
安裝	單工水箱 (包括螺釘)
安裝	單工, 白色 (隨附); 提供黑色選項 (KP-6B)
LED指示燈	音量條, 信號源, 按鍵
紅外線指示燈	鍵盤接收到的IR由所選定光源的IR端口重新傳輸
系統要求	Mirage擴大器 (M-400或M-800) 固件版本2.0或更高版本 Mirage媒體服務器 (MMS-5A或MMS-2A) 固件版本5.2.19572.46 或更高版本
B類數位設備 合規性	FCC: FCC規則第15條 CE: EN55022、EN55024、EN61000-3-3、EN61000-6-1、EN61000-6-3

尺寸

	KP-6	KP-6 EURO
寬X高	2.95" x 4.70" (75mm x 119.5mm)	3.15" x 3.15" (80mm x 80mm)
面板深度	0.31" (7.9mm)	0.31" (7.9mm)
安裝深度	0.57" (14.5mm)	0.57" (14.5mm)
牆壁鏤空	1.77" x 2.95" (45mm x 75mm)	1.77" x 2.75" (45mm x 70mm)



KP-6



KP-6B



KP-6 (背面)



©2006-2016 Autonomic Controls, Inc. Autonomic and TuneBridge are registered trademarks of Autonomic Controls, Inc. +1 914 598 1647
All other trademarks are property of their respective owners. Specifications are based on current revision and may change without notice. 030716